

Model BD 260 | Standard-Incubators with gravity convection

The BD Avantgarde.Line series is specially designed for gentle incubation of organisms, as well as conditioning of heat-sensitive media. The new design of the units and the homogeneous temperature distribution ensure the very best results.

BENEFITS

- Excellent temporal and spatial temperature accuracy
- High process reliability
- 100 °C disinfection routine



Model 260



Model 260

MAIN FEATURES

- Temperature range: ambient temperature plus 5 °C to 100 °C
- High temperature accuracy thanks to APT.line™ technology
- Gravity convection
- Controller with LCD display
- Electromechanical control of the exhaust air flap
- Inner door made of tempered safety glass
- 2 chrome-plated racks
- Units up to 115 L are stackable
- Class 3.1 integrated independent temperature safety device (DIN 12880) with visual alarm
- Ergonomic handle design
- USB port for recording data

ORDERING INFORMATION

Interior volume [cu.ft.]	Voltage	Option model	Version	Art.-No.
8.9	230 V 1~ 50/60 Hz	Standard	BD260-230V	9010-0329
	120 V 1~ 60 Hz	Standard	BD260UL-120V	9010-0330

TECHNICAL DATA


Description	BD260-230V ¹	BD260UL-120V ¹
Article Number	9010-0329	9010-0330
Performance Data Temperature		
Temperature range +5 °C above ambient temperature to	100 °C	100 °C
Temperature variation at 37 °C [± K]	0.3	0.3
Temperature fluctuation at 37 °C [± K]	0.2	0.2
Heating-up time to 37 °C [min]	60	60
Recovery time after 30 seconds door open at 37 °C [min]	16	16

¹ All technical data is specified for unloaded units with standard equipment at an ambient temperature of +22 °C ±3 °C and a power supply voltage fluctuation of ±10%. The temperature data is determined to BINDER factory standard following DIN 12880, observing the recommended wall clearances of 10 % of the height, width, and depth of the inner chamber. All indications are average values, typical for units produced in series. We reserve the right to change technical specifications at any time.

Description	BD260-230V ¹	BD260UL-120V ¹
Article Number	9010-0329	9010-0330
Electrical data		
Rated Voltage [V]	230	120
Power frequency [Hz]	50/60	60
Nominal power [kW]	0.85	0.95
Unit fuse [A]	8	12.5
Phase (Nominal voltage)	1~	1~
Measures		
Interior volume [cu.ft.]	8.9	8.9
Net weight of the unit (empty) [lbs]	183	183
Permitted load [lbs]	595	595
Load per rack [lbs]	88	88
Wall clearance back [in]	6.3	6.3
Wall clearance sidewise [in]	3.94	3.94
Internal Dimensions		
Width [in]	24.03	24.03
Height [in]	29.94	29.94
Depth [in]	21.47	21.47
Doors		
Unit doors	1	1
Housing dimensions not incl. fittings and connections		
Width net [in]	31.91	31.91
Height net [in]	34.67	34.67
Depth net [in]	29.94	29.94
Environment-specific data		
Energy consumption at 37 °C [Wh/h]	40	40
Fixtures		
Number of shelves (std./max.)	2/8	2/8

1 All technical data is specified for unloaded units with standard equipment at an ambient temperature of +22 °C ±3 °C and a power supply voltage fluctuation of ±10%. The temperature data is determined to BINDER factory standard following DIN 12880, observing the recommended wall clearances of 10 % of the height, width, and depth of the inner chamber. All indications are average values, typical for units produced in series. We reserve the right to change technical specifications at any time.

DIMENSIONS INCL. FITTINGS AND CONNECTIONS [MM]

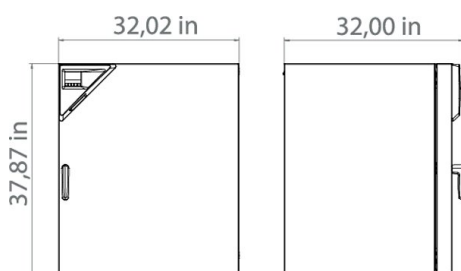

OPTIONS

Designation	Description	*	Art.-No.
Calibration certificate, temperature	temperature measurement incl. certificate and 27 measuring points at specified temperature	-	8012-0921
	additional flexible Pt 100, interior, for displaying the temperature on the unit display	-	8012-0940
Options/Accessories	back		
	10 mm	01	8012-0390
	30 mm	01	8012-0397
	50 mm	01	8012-0399
	battery-backed	-	8012-0981
	for Multi Management Software APT-COM™	-	8012-0986
	for temperature values (output not adjustable)	02	8012-0941
	for temperature; for extending the measurement in center of chamber to include another test temperature	-	8012-1110
	left		
	10 mm	01	8012-0388
	30 mm	01	8012-0047
	50 mm	01	8012-0051
	lockable door handle	-	8012-1025
	Measurement in center of chamber at specified temperature	-	8012-1129
	right		
	10 mm	01	8012-0387
	30 mm	01	8012-0046
	50 mm	01	8012-0050
	Switchable acoustic alarm, with adjustable limit value on the independent temperature safety device	-	8012-0979
	temperature measurement incl. certificate, 15- 18 measuring points at specified temperature	-	8012-0918
	temperature measurement incl. certificate, 9 measuring points at specified temperature	-	8012-0915
	top		
10 mm	01	8012-0386	
30 mm	01	8012-0045	
50 mm	01	8012-0049	
100 mm	01, 10	8012-0053	
Waterproof, switched flush-mounting box (CA3GD) for nominal voltage in unit interior, with cover and corresponding plug (nominal voltage; max. 500 W; max. 90 °C; protection class IP67)	07	8012-0980	
with 15 W light bulb			
120 V option model	-	8012-1630	
230 V option model	-	8012-0969	

* Notes › See last page

ACCESSORIES

Designation	Description	*	Art.-No.
Multi Management Software	Multi Management Software APT-COM™		
	version 4, BASIC edition	19	9053-0039
	version 4, GLP edition	19	9053-0042
	version 4, PROFESSIONAL edition	19	9053-0040

* Notes › See last page

Designation	Description	*	Art.-No.
	chrome plated	-	6004-0177
	Stainless steel	-	6004-0193
	stainless steel	-	6004-0161
	concentrated, for gentle remove of residual contaminants; 1 kg	-	1002-0016
	IQ/OQ documents – supporting documents for validation performed by customers, consisting of: IQ/OQ checklists incl. calibration guide and comprehensive unit documentation; parameters: temperature, CO ₂ , O ₂ , pressure, depending on unit		
	Digital in PDF format	-	7057-0001
	Hard copy inside folder	-	7007-0001
Options/Accessories	IQ/OQ/PQ documents – supporting documents for validation performed by customers, according to customer requirements, PQ section added to qualification folder IQ/OQ; parameters: temperature, CO ₂ , O ₂ – or pressure, depending on unit		
	Digital in PDF format	-	7057-0005
	Hard copy inside folder	-	7007-0005
	LOG ANALYZE software kit, configuration and evaluation software for all BINDER Data Logger Kits (incl. USB data cable)	19	8012-0821
	set of 4 anti-slip feet, for safe stacking of units	-	8012-1887
	stable cart, casters with locking brakes, dimensions: W 1,300 x D 800 x H 780 mm	-	9051-0019
	Stainless steel, max. load per rack 70 kg	-	6004-0203
	T 220: For continuous temperature logging from -90 °C to 220 °C. The kit includes 1 data logger, Pt 100 sensor with 2 m extension cable and 1 magnetic fixture for mounting to the BINDER unit	19	8012-0715

* Notes › See last page

SERVICES

Designation	Description	*	Art.-No.
Installation services			
Services	Unit function instructions for operation and programming of the controller	18	DL10-0500
	Unpacking and setting up of unit, connecting to existing connections, and checking function	13, 18	DL10-0100
Preventive maintenance			
Services	Executive of equipment inspection according to maintenance plan	14, 18	DL20-0200
Calibration services			
Services	Expansion – including certificate, each additional measuring point in center of chamber at specified test temperature	14, 16, 17, 18	DL30-0102
	Temperature calibration with 1 measuring point in center of chamber at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0101
	Temperature measurement with 18 measuring points at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0118
	Temperature measurement with 27 measuring points at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0127
	Temperature measurement with 9 measuring points at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0109
Validation services			
Services	Execution of IQ/OQ in accordance with qualification folder	15, 18	DL40-0100
	Execution of IQ/OQ/PQ in accordance with qualification folder	15, 18	DL44-0500
Warranty service			
Services	The warranty is extended from 2 to 3 years from the delivery date, wear parts are excluded	-	DL01-6041
	The warranty is extended from 2 to 5 years from the delivery date, wear parts are excluded	-	DL01-6042

* Notes › See last page

NOTES

- 01 Hinweise
- 02 Hinweise
- 03 Hinweise
- 04 Hinweise
- 07 Hinweise
- 09 Hinweise
- 10 Hinweise
- 11 Hinweise
- 12 Hinweise
- 13 Hinweise
- 14 Hinweise
- 15 Hinweise
- 16 Hinweise
- 17 Hinweise
- 18 Hinweise
- 19 Hinweise

BINDER GmbH

Tuttlingen, Germany
TEL +49 7462 2005 0
FAX +49 7462 2005 100
info@binder-world.com
www.binder-world.com

BINDER Asia Pacific (Hong Kong) Ltd.

Kowloon, Hong Kong, P.R. China
TEL +852 39070500
FAX +852 39070507
asia@binder-world.com
www.binder-world.com

Representative Office for CIS

Moscow, Russia
TEL +7 495 988 15 16
FAX +7 495 988 15 17
russia@binder-world.com
www.binder-world.com

BINDER Environmental Testing Equipment (Shanghai) Co., Ltd.

Shanghai, P.R. China
TEL +86 21 685 808 25
FAX +86 21 685 808 29
china@binder-world.com
www.binder-world.com

BINDER Inc.

Bohemia, NY, USA
TEL +1 631 224 4340
FAX +1 631 224 4354
usa@binder-world.com
www.binder-world.us