

Model FP 115 | Drying and heating chambers with forced convection and program functions

A BINDER material test chamber with mechanical convection of the FP series provides reliably short drying times and particularly fast heating – even for chambers under full loads.

BENEFITS

- Uniform drying conditions thanks to APT.line™ technology
- Identical test conditions throughout the chamber interior independent of sample size and quantity
- Outstanding thermal insulation saves operation costs
- Advanced programming options



Model 115



Model 115

MAIN FEATURES

- Temperature range: room temperature plus 5 °C to 300 °C
- APT.line™ preheating chamber technology
- Adjustable fan speed
- Adjustable exhaust air flap
- Controller with time-segment and real-time programming
- 2 chrome-plated racks
- Class 2 independent adjustable temperature safety device (DIN 12880) with visual alarm
- Computer interface: RS 422

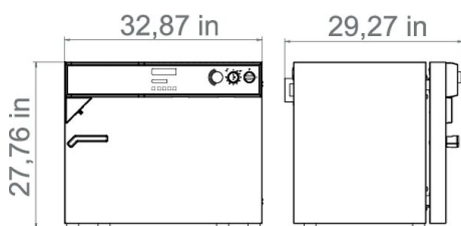
ORDERING INFORMATION

Interior volume [cu.ft.]	Voltage	Option model	Version	Art.-No.
4.1	230 V 1~ 50/60 Hz	Standard	FP115-230V	9010-0255
	120 V 1~ 60 Hz	Standard	FP115UL-120V	9010-0262

TECHNICAL DATA

Description	FP115-230V ¹	FP115UL-120V ¹
Article Number	9010-0255	9010-0262
Performance Data Temperature		
Temperature range +5 °C above ambient temperature to	300 °C	300 °C
Temperature variation at 150 °C [± K]	1.8	1.8
Temperature fluctuation at 150 °C [± K]	0.3	0.3
Heating-up time to 150 °C [min]	30	30
Recovery time after 30 seconds door open at 150 °C [min]	8	8
Air change data		
Air change (approx.) at 150 °C [x/h]	32	32
Electrical data		
Rated Voltage [V]	230	120
Power frequency [Hz]	50/60	60
Nominal power [kW]	1.6	1.6
Unit fuse [A]	10	16
Phase (Nominal voltage)	1~	1~
Measures		
Interior volume [cu.ft.]	4.1	4.1
Net weight of the unit (empty) [lbs]	137	137
Permitted load [lbs]	110	110
Load per rack [lbs]	44	44
Wall clearance back [in]	6.3	6.3
Wall clearance sidewise [in]	3.94	3.94
Internal Dimensions		
Width [in]	23.64	23.64
Height [in]	18.91	18.91
Depth [in]	16.15	16.15
Housing dimensions not incl. fittings and connections		
Width net [in]	32.9	32.9
Height net [in]	27.78	27.78
Depth net [in]	25.41	25.41
Environment-specific data		
Energy consumption at 150 °C [Wh/h]	544	544
Fixtures		
Number of shelves (std./max.)	2/6	2/6

1 All technical data is specified for unloaded units with standard equipment at an ambient temperature of +22 °C ±3 °C and a power supply voltage fluctuation of ±10 %. The temperature data is determined in accordance to BINDER factory standard following DIN 12880, observing the recommended wall clearances of 10 % of the height, width, and depth of the inner chamber. Technical data refers to 100 % fan speed. All indications are average values, typical for units produced in series. We reserve the right to change technical specifications at any time.

DIMENSIONS INCL. FITTINGS AND CONNECTIONS [MM]

OPTIONS

Designation	Description	*	Art.-No.
Calibration certificate, temperature	temperature measurement incl. certificate and 27 measuring points at specified temperature	-	8012-1597
	additional flexible Pt 100, interior, for displaying the temperature on the unit display	-	8012-0504
Options/Accessories	back		
	10 mm	01	8012-1286
	30 mm	01	8012-1370
	50 mm	01	8012-1386
	for controlling 3 relay contacts via program regulators, accessible via 6-pin DIN socket (max. 24 V - 2.5 A)		
	120/208 V option model	-	8012-0472
	230/400 V option model	-	8012-0471
	for temperature values (output not adjustable)	02	8012-0481
	for temperature; for extending the measurement in center of chamber to include another test temperature	-	8012-1119
	in accordance with ASTM D5374, definition and protocol according to ambient temperature	-	8012-1198
	Incl. additional measures for the greatest possible impermeability to gas; not in conjunction with access port or interior lighting option	09	8012-0182
	left		
	10 mm	01	8012-1279
	30 mm	01	8012-1362
	50 mm	01	8012-1378
	100 mm	01, 11	8012-1510
	lockable door handle	-	8012-1249
	made of FKM, silicone-free	03	8012-0495
	Measurement in center of chamber at specified temperature	-	8012-1138
	On fresh air supply for unit; filter classification H14 (acc. to EN 1822-1:2009, > 99.995% at 0.3 µm)	-	8012-1169
	right		
	10 mm	01	8012-1272
	30 mm	01	8012-1357
	50 mm	01	8012-1374
	100 mm	01, 11	8012-1507
	temperature measurement incl. certificate, 15- 18 measuring points at specified temperature	-	8012-1576
	temperature measurement incl. certificate, 9 measuring points at specified temperature	-	8012-1555
	to increase air change rates		
230 V option model	-	8012-0198	
top			
10 mm	01	8012-1265	
30 mm	01	8012-1366	
50 mm	01	8012-1382	
100 mm	01, 10	8012-1389	
viewing window in door, 320 x 260 mm, and 15 W interior lighting			
120 V option model	-	8012-0238	
230 V option model	-	8012-0056	
with gas inlet and outlet, Ø 10 mm, incl. additional measures to provide the greatest possible impermeability to gas	-	8012-0841	
with visual alarm (DIN 12880)	04, 12	8012-1149	

* Notes › See last page

ACCESSORIES

Designation	Description	*	Art.-No.	
Multi Management Software	Multi Management Software APT-COM™			
	version 4, BASIC edition	19	9053-0039	
	version 4, GLP edition	19	9053-0042	
	version 4, PROFESSIONAL edition	19	9053-0040	
Options/Accessories	chrome plated	–	6004-0003	
	Stainless steel	–	6004-0030	
	stainless steel	–	6004-0008	
	concentrated, for gentle remove of residual contaminants; 1 kg	–	1002-0016	
	fasteners (1 set of 4) for additional security of racks	–	8012-0531	
	IQ/OQ documents – supporting documents for validation performed by customers, consisting of: IQ/OQ checklists incl. calibration guide and comprehensive unit documentation; parameters: temperature, CO ₂ , O ₂ , pressure, depending on unit			
	Digital in PDF format	–	7057-0001	
	Hard copy inside folder	–	7007-0001	
	IQ/OQ/PQ documents – supporting documents for validation performed by customers, according to customer requirements, PQ section added to qualification folder IQ/OQ; parameters: temperature, CO ₂ , O ₂ – or pressure, depending on unit			
	Digital in PDF format	–	7057-0005	
	Hard copy inside folder	–	7007-0005	
	LOG ANALYZE software kit, configuration and evaluation software for all BINDER Data Logger Kits (incl. USB data cable)	19	8012-0821	
	set of 4 anti-slip feet, for safe stacking of units	–	8012-1887	
	stable cart, casters with locking brakes, dimensions: W 1,000 x D 800 x H 780 mm	–	9051-0018	
	T 350: For continuous temperature logging from 0 °C to 350 °C; kit includes 1 data logger, Pt 100 sensor with 2 m extension cable and 1 magnetic fixture for mounting to the BINDER unit	19	8012-0714	
with lid made from 18/8 stainless steel, stackable, dimensions: 230 x 133 x 45 mm	–	4022-0123		
with lid made from 18/8 stainless steel, stackable, dimensions: 315 x 215 x 60 mm	–	4022-0124		

* Notes › See last page

SERVICES

Designation	Description	*	Art.-No.
Installation services			
Services	Unit function instructions for operation and programming of the controller	18	DL10-0500
	Unpacking and setting up of unit, connecting to existing connections, and checking function	13, 18	DL10-0100
Preventive maintenance			
Services	Executive of equipment inspection according to maintenance plan	14, 18	DL20-0200
Calibration services			
Services	Expansion – including certificate, each additional measuring point in center of chamber at specified test temperature	14, 16, 17, 18	DL30-0102
	including certificate (in accordance with ASTM D5374)	14, 16, 17, 18	DL33-0000
	Temperature calibration with 1 measuring point in center of chamber at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0101
	Temperature measurement with 18 measuring points at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0118
	Temperature measurement with 27 measuring points at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0127
	Temperature measurement with 9 measuring points at a specified test temperature, including certificate	14, 16, 17, 18	DL30-0109
Validation services			
Services	Execution of IQ/OQ in accordance with qualification folder	15, 18	DL41-0200
	Execution of IQ/OQ/PQ in accordance with qualification folder	15, 18	DL44-0500

* Notes › See last page

Designation	Description	*	Art.-No.
Warranty service			
Services	The warranty is extended from 2 to 3 years from the delivery date, wear parts are excluded	-	DL00-5041
	The warranty is extended from 2 to 5 years from the delivery date, wear parts are excluded	-	DL00-5042

* Notes › See last page

NOTES

- 01 Condensation may occur in the area around the access port. Access ports may be placed in custom locations for an additional charge.
- 02 UL mark is not granted when this option is used.
- 03 Heat resistant only to max. 200 °C.
- 04 Only available on units rated for 230 V.
- 07 The additional heat input may affect the temperature behavior.
- 09 Not in conjunction with the optional access port, door with window and interior lighting.
- 10 Not available on 23-liter units.
- 11 Not available on 23- or 53-liter units.
- 12 Only available on units rated for 230 V or 400 V.
- 13 Installation and connections take place at unit location; transport within the company only upon consultation.
- 14 We recommend a BINDER service contract to cover unit inspections, calibrations and validations.
- 15 OQ according to Yellow Paper = completed factory validation documentation of all OQ checklists.
- 16 Sensor calibration is performed in an accredited calibration laboratory.
- 17 Calibration is performed according to the BINDER factory standard.
- 18 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).
- 19 For additional accessories, refer to the Process documentation chapter.

BINDER GmbH

Tuttlingen, Germany
TEL +49 7462 2005 0
FAX +49 7462 2005 100
info@binder-world.com
www.binder-world.com

BINDER Asia Pacific (Hong Kong) Ltd.

Kowloon, Hong Kong, P.R. China
TEL +852 39070500
FAX +852 39070507
asia@binder-world.com
www.binder-world.com

Representative Office for CIS

Moscow, Russia
TEL +7 495 988 15 16
FAX +7 495 988 15 17
russia@binder-world.com
www.binder-world.com

**BINDER Environmental Testing
Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China
TEL +86 21 685 808 25
FAX +86 21 685 808 29
china@binder-world.com
www.binder-world.com

BINDER Inc.

Bohemia, NY, USA
TEL +1 631 224 4340
FAX +1 631 224 4354
usa@binder-world.com
www.binder-world.us