

# Model FP 240 | Drying and heating chambers with forced convection and program functions

A BINDER material test chamber with mechanical convection of the FP series provides reliably short drying times and particularly fast heating – even for chambers under full loads.

## BENEFITS

- Uniform drying conditions thanks to APT.line™ technology
- Identical test conditions throughout the chamber interior independent of sample size and quantity
- Outstanding thermal insulation saves operation costs
- Advanced programming options



Model 240



Model 240

## MAIN FEATURES

- Temperature range: +5 °C above ambient temperature to +300 °C
- APT.line™ preheating chamber technology
- Adjustable fan speed
- Adjustable exhaust air flap
- Controller with time-segment and real-time programming
- 2 chrome-plated racks
- Class 2 independent adjustable temperature safety device (DIN 12880) with visual alarm
- Computer interface: RS 422

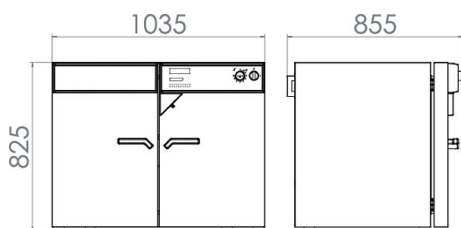
## ORDERING INFORMATION

| Interior volume [L] | Voltage              | Option model | Version      | Art.-No.  |
|---------------------|----------------------|--------------|--------------|-----------|
| 240                 | 230 V 1~ ph 50/60 Hz | Standard     | FP240-230V   | 9010-0263 |
|                     | 208 V 3~ ph 60 Hz    | Standard     | FP240UL-208V | 9010-0264 |

**TECHNICAL DATA**

| Description  | FP240-230V <sup>1</sup> | FP240UL-208V <sup>1</sup> |
|--|-------------------------|---------------------------|
| <b>Article Number</b>  | <b>9010-0263</b>        | <b>9010-0264</b>          |
| <b>Performance Data Temperature</b>                          |                         |                           |
| Temperature range +5 °C above ambient temperature to [°C]    | 300                     | 300                       |
| Temperature variation at 150 °C [± K]                        | 2                       | 2                         |
| Temperature fluctuation at 150 °C [± K]                      | 0.3                     | 0.3                       |
| Heating-up time to 150 °C [min]                              | 27                      | 27                        |
| Recovery time after 30 seconds door open at 150 °C [min]     | 10                      | 10                        |
| <b>Air change data</b>                                       |                         |                           |
| Air change (approx.) at 150 °C [x/h]                         | 20                      | 20                        |
| <b>Electrical data</b>                                       |                         |                           |
| Rated Voltage [V]  | 230                     | 208                       |
| Power frequency [Hz]   | 50/60                   | 60                        |
| Nominal power [kW]   | 2.7                     | 2.7                       |
| Unit fuse [A]  | 16                      | 3 x 16                    |
| Phase (Nominal voltage)                                      | 1~                      | 3~                        |
| <b>Measures</b>  |                         |                           |
| Interior volume [L]  | 240                     | 240                       |
| Net weight of the unit (empty) [kg]                          | 96                      | 96                        |
| Permitted load [kg]  | 70                      | 70                        |
| Load per rack [kg]   | 30                      | 30                        |
| Wall clearance back [mm]                                     | 160                     | 160                       |
| Wall clearance sidewise [mm]                                 | 100                     | 100                       |
| <b>Internal Dimensions</b>                                   |                         |                           |
| Width [mm]   | 800                     | 800                       |
| Height [mm]  | 600                     | 600                       |
| Depth [mm]   | 510                     | 510                       |
| <b>Housing dimensions not incl. fittings and connections</b> |                         |                           |
| Width net [mm]   | 1035                    | 1035                      |
| Height net [mm]  | 825                     | 825                       |
| Depth net [mm]   | 745                     | 745                       |
| <b>Environment-specific data</b>                             |                         |                           |
| Energy consumption at 150 °C [Wh/h]                          | 850                     | 850                       |
| <b>Fixtures</b>  |                         |                           |
| Number of shelves (std./max.)                                | 2/7                     | 2/7                       |

1 All technical data is specified for unloaded units with standard equipment at an ambient temperature of +22 °C ±3 °C and a power supply voltage fluctuation of ±10 %. The temperature data is determined in accordance to BINDER factory standard following DIN 12880, observing the recommended wall clearances of 10 % of the height, width, and depth of the inner chamber. Technical data refers to 100 % fan speed. All indications are average values, typical for units produced in series. We reserve the right to change technical specifications at any time.

**DIMENSIONS incl. fittings and connections [mm]**

**OPTIONS**

| Designation  | Description   | *  | Art.-No.  |
|--|---|----|-----------|
|  | back  |    |           |
|  | 10 mm   | 01 | 8012-1286 |
|  | 30 mm   | 01 | 8012-1370 |
|  | 50 mm   | 01 | 8012-1386 |
|  | left  |    |           |
|  | 10 mm   | 01 | 8012-1279 |
|  | 30 mm   | 01 | 8012-1362 |
|  | 50 mm   | 01 | 8012-1378 |
|  | 100 mm  | 01 | 8012-1510 |
| <b>Access port with silicone plug</b>                  | right   |    |           |
|  | 10 mm   | 01 | 8012-1272 |
|  | 30 mm   | 01 | 8012-1357 |
|  | 50 mm   | 01 | 8012-1374 |
|  | 100 mm  | 01 | 8012-1507 |
|  | top   |    |           |
|  | 10 mm   | 01 | 8012-1265 |
|  | 30 mm   | 01 | 8012-1366 |
|  | 50 mm   | 01 | 8012-1382 |
|  | 100 mm  | 01 | 8012-1389 |
| <b>Analog output 4-20 mA</b>                           | for temperature values (output not adjustable)  | 02 | 8012-0481 |
| <b>Calibration certificate, expanded</b>               | for temperature; for extending the measurement in center of chamber to include another test temperature | -  | 8012-1119 |
|  | for temperature, measurement in center of chamber at specified temperature                              | -  | 8012-1138 |
| <b>Calibration certificate, temperature</b>            | temperature measurement incl. certificate and 27 measuring points at specified temperature              | -  | 8012-1597 |
|  | temperature measurement incl. certificate, 15- 18 measuring points at specified temperature             | -  | 8012-1576 |
|  | temperature measurement incl. certificate, 9 measuring points at specified temperature                  | -  | 8012-1555 |
| <b>Class 3.1 independent temperature safety device</b> | with visual alarm (DIN 12880)   | -  | 8012-1149 |
| <b>Door gasket</b>                                     | made of FKM, silicone-free  | -  | 8012-0496 |
| <b>Door lock</b>                                       | lockable door handle  | -  | 8012-1255 |
| <b>Fan, reinforced</b>                                 | to increase air change rates  |    |           |
|  | 230 V option model  | -  | 8012-0199 |
| <b>HEPA air filter</b>                                 | On fresh air supply for unit; filter classification H14 (acc. to EN 1822-1:2009, > 99.995% at 0.3 µm)   | -  | 8012-1169 |
| <b>Inner chamber, reinforced</b>                       | including 2 reinforced racks  |    |           |
|  | max. total load 250 kg  | -  | 8012-0338 |
| <b>Measurement of air exchange rate</b>                | in accordance with ASTM D5374, definition and protocol according to ambient temperature                 | -  | 8012-1198 |
| <b>Pt 100 temperature sensor</b>                       | additional flexible Pt 100, interior, for displaying the temperature on the unit display                | -  | 8012-0504 |
| <b>Viewing window and interior lighting</b>            | viewing window in each door, 350 x 240 mm, and 30 W interior lighting                                   |    |           |
|  | 208 V option model  | -  | 8012-0239 |
|  | 230 V option model  | -  | 8012-0058 |

\* Notes › See last page

**ACCESSORIES**

| Designation                     | Description   | * | Art.-No.  |
|---------------------------------|---|---|-----------|
| <b>APT-COM™ 4 BASIC-Edition</b> | for simple logging and documentation requirements with up to 5 networked units.<br>version 4, BASIC edition | - | 9053-0039 |

\* Notes › See last page

| Designation                            | Description   | * | Art.-No.  |
|--|---|---|-----------|
| <b>APT-COM™ 4 GLP-Edition</b>          | for working under GLP-compliant conditions. Measured values are documented in a tamper-proof way in line with the requirements of FDA Regulation 21 CFR 11.<br>version 4, GLP edition   | - | 9053-0042 |
| <b>APT-COM™ 4 PROFESSIONAL-Edition</b> | convenient unit and user management built on the BASIC edition. Suitable for networking up to 100 units.<br>version 4, PROFESSIONAL edition   | - | 9053-0040 |
| <b>pH-neutral detergent</b>            | concentrated, for gentle remove of residual contaminants; 1 kg  | - | 1002-0016 |
| <b>Qualification documents</b>         | IQ/OQ documents – supporting documents for validation performed by customers, consisting of: IQ/OQ checklists incl. calibration guide and comprehensive unit documentation; parameters: temperature, CO <sub>2</sub> , O <sub>2</sub> , pressure, depending on unit |   |           |
|  | Digital in PDF format   | - | 7057-0001 |
|  | Hard copy inside folder   | - | 7007-0001 |
|  | IQ/OQ/PQ documents – supporting documents for validation performed by customers, according to customer requirements, PQ section added to qualification folder IQ/OQ; parameters: temperature, CO <sub>2</sub> , O <sub>2</sub> – or pressure, depending on unit     |   |           |
|  | Digital in PDF format   | - | 7057-0005 |
|  | Hard copy inside folder   | - | 7007-0005 |
| <b>Rack</b>                            | chrome plated   | - | 8012-2035 |
|  | stainless steel   | - | 8012-2080 |
| <b>Rack accessories</b>                | fasteners (1 set of 4) for additional security of racks   | - | 8012-0531 |
| <b>Rack, reinforced</b>                | stainless steel, with fasteners (1 set of 4)  | - | 8012-0345 |
| <b>Rubber pads</b>                     | set anti-slip feet  | - | 8012-2030 |
| <b>Shelf, perforated</b>               | Stainless steel   | - | 8012-2084 |
| <b>Table on castors</b>                | stable cart, casters with locking brakes, dimensions: W 1,300 x D 800 x H 780 mm  | - | 9051-0019 |

\* Notes › See last page

## SERVICES

| Designation                                  | Description   | *          | Art.-No.  |
|--|---|------------|-----------|
| <b>Installation services</b>                 |   |            |           |
| Unit commissioning                           | Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup, controller instructions, programming, installation work)  | 05         | DL10-0100 |
| Unit instructions                            | Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming   | 05         | DL10-0500 |
| <b>Maintenance contracts</b>                 |   |            |           |
| <b>Maintenance services</b>                  |   |            |           |
| BRONZE 3-year maintenance contract           | Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts  | 05         | DL20-0710 |
| GOLD 3-year maintenance contract             | Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts, testing of all key functions, replacement of wear parts, calibration of one test temperature specified by the user in the center of the usable space, including certificate | 05         | DL20-0910 |
| Maintenance                                  | One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Calibration of a test temperature specified by the user in center of usable space without certificate   | 05         | DL20-0200 |
| SILVER 3-year maintenance contract           | Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts, testing of all key functions, calibration of one test temperature specified by the user in the center of the usable space, without certificate                              | 05         | DL20-0810 |
| <b>Calibration services</b>                  |   |            |           |
| Calibration certificate, temperature         | Calibration of one (1) test temperature specified by the user in center of chamber, including certificate   | 03, 04, 05 | DL30-0101 |
|  | Extension of calibration of one (1) additional test temperature specified by the user in the center of the usable space, including certificate  | 03, 04, 05 | DL30-0102 |
| Measurement of air exchange rate             | including certificate (in accordance with ASTM D5374)   | 03, 04, 05 | DL33-0000 |
| Temperature measurement, 18 measuring points | Temperature measurement with 18 measuring points with a set value specified by the user, including certificate  | 03, 04, 05 | DL30-0118 |

\* Notes › See last page

| Designation                                  | Description  | *          | Art.-No.  |
|--|--|------------|-----------|
| Temperature measurement, 27 measuring points | Temperature measurement with 27 measuring points with a set value specified by the user, including certificate | 03, 04, 05 | DL30-0127 |
| Temperature measurement, 9 measuring points  | Temperature measurement with 9 measuring points with a set value specified by the user, including certificate  | 03, 04, 05 | DL30-0109 |
| <b>Validation services</b>                   |  |            |           |
| Execution of IQ/OQ                           | Execution of IQ/OQ in accordance with qualification folder   | 05         | DL41-0200 |
| Execution of IQ/OQ/PQ                        | Execution of IQ/OQ/PQ in accordance with qualification folder  | 05         | DL44-0500 |
| <b>Warranty service</b>                      |  |            |           |
| 1-year warranty extension                    | The warranty is extended by 1 year from the delivery date, wear parts are excluded                             | -          | DL50-0010 |

\* Notes › See last page

**NOTES**

- 01 Condensation may occur in the area around the access port. Access ports may be placed in custom locations for an additional charge.
- 02 UL mark is not granted when this option is used.
- 03 Sensor calibration is performed in an accredited calibration laboratory.
- 04 Calibration is performed according to the BINDER factory standard.
- 05 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).

**BINDER GmbH**

Tuttlingen, Germany  
TEL +49 7462 2005 0  
FAX +49 7462 2005 100  
info@binder-world.com  
www.binder-world.com

**BINDER Asia Pacific (Hong Kong) Ltd.**

Kowloon, Hong Kong, P.R. China  
TEL +852 39070500  
FAX +852 39070507  
asia@binder-world.com  
www.binder-world.com

**Representative Office for CIS**

Moscow, Russia  
TEL +7 495 988 15 16  
FAX +7 495 988 15 17  
russia@binder-world.com  
www.binder-world.com

**BINDER Environmental Testing  
Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China  
TEL +86 21 685 808 25  
FAX +86 21 685 808 29  
china@binder-world.com  
www.binder-world.com

**BINDER Inc.**

Bohemia, NY, USA  
TEL +1 631 224 4340  
FAX +1 631 224 4354  
usa@binder-world.com  
www.binder-world.us